

Test Report

No: GZFDO100804251FD

Client name : BestSub Technologies Co., Ltd. Client address: Rm 8A01, Jinzhou International Business Center, No. 899 Jiefangbei Rd, Guangzhou, 510015, China

The following sample(s) was/were submitted by/ on behalf of the client as:

Sample Name: Sublimation Glass Clock Batch/Date: / Manufacturer: / Other: No.:01 SGS reference no.: GZ1008095332/CHEM SGS job no.: GZFDO100803251FD Date of receipt: Aug. 12, 2010 Testing period: Aug. 12, 2010 ~ Aug. 30, 2010

TEST(S) REQUESTED:

Selected test(s) as requested by applicant:

- A: As specified by client, with reference to European Council Directive 84/500/EEC & 2005/31/EC-Ceramic articles intended to come into contact with foodstuffs requirements on lead and cadmium extracted by acetic acid from ceramic surfaces.
- B: To determine the Overall Migration in accordance with Council of Europe Resolution AP(2004)1 relating to coatings intended to come into contact with foodstuffs.

TEST METHOD(S):

A: As specified in EEC Directive 84/500/EEC & 2005/31/EC. Analysis was performed by ICP-OES.

B: With reference to EN 1186-1:2002 for selection of temperature and condition;
With reference to EN 1186-14:2002 for for overall migration into iso-octane and 95% aqueous ethanol;
With reference to EN 1186-3:2002 for overall migration into aqueous food stimulants by total immersion method.

TEST RESULT(S): Please refer to next page.

CONCLUSION:

- A: When tested as specified, the test result of submitted sample(s) #1 are within limits stated in European Council Directive 84/500/EEC & 2005/31/EC on lead and cadmium extracted by acetic acid from ceramic surfaces.
- B: When tested as specified, the submitted sample(s) #2 comply with the limit of the overall migration as stated in Council of Europe Resolution AP (2004)1 relating to coatings intended to come into contact with foodstuffs.

Signed for and on behalf of SGS

Authorized Signature

 Page 1 of 3

 Provide a non-space of the company subject to its General Conditions of Service printed overlate, available on request or accessible at http://www.gs.com/terms_and_conditions of itability, indegratemester and conditions for Electronic Documents at www.gs.com/terms_action.htm. Attention is drawn to the limitation of liability, indegratemester and unside that is used at http://www.gs.com/terms_action.htm. Attention is drawn to the limitation of liability, indegratemester and unside that information contained hereon reflects the Company's findings at the time of liability, indegratemester and unside that be and unside the rein. Any holder of this document is and/subtent and this document does not exonerate particles to a transaction from exercising all their right and obligations under the transaction documents. This document cannot be reproduced except in full, without prior written approval of the Company. Any updationized atteration? yeers or faisification of the contretor of the sample(s) tested.

 Any updationized atteration? Unless (therewise stated the refults shown in this test report refer only to the sample(s) tested.

 Attention: The earth ticity of testing /inspection report & certificate, please contact us at telephone: (86-755)83071443, or email: <u>CN.Doccheck@gss.com</u>

 GZFD

 SSSCST transfer Steining Ceremic Laborator.

 Pin End Midde Device Ceremic Steining Ceremic Steining



Test Report

No: GZFDO100804251FD

Date: Aug. 30, 2010

TEST RESULT(S):

A:#1

Leachable Lead and Cadmium Content

^-+----

| Category 1 | | | | | PASS |
|------------|------------------|------------------------------------|------------------------|-------------------------------|----------------------------------|
| No | Diameter (mm) | Surface Area (dm ²) | Extract Volume (ml) | Lead (mg/dm ²) | Cadmium (mg/dm ²) |
| 1 | 280X200 | 11.20 | 1870 | < 0.1 | < 0.01 |
| 2 | | | | < 0.1 | < 0.01 |
| 3 | | | | < 0.1 | < 0.01 |
| 4 | | | | < 0.1 | < 0.01 |
| Limit | | | | 0.8 | 0.07 |

All results were read directly from ICP.

- Remark: 1. < = Less than
 - 2. Category 1

Articles which cannot be filled and articles which can be filled, the internal depth of which does not exceed 25mm.

Category 2

All other articles which can be filled.

Category 3

Cooking ware; packaging and storage vessels having a capacity of more than three litres.

| Simulant Used | Test Condition | Overall Migration (mg/dm ²) | Maximum Permissible Limit (mg/dm ²) |
|-------------------------|------------------|--|--|
| Distilled water | 2 hours at 70 ℃ | < 3.0 | 10 |
| 3% Acetic acid (w/v) | 2 hours at 70 ℃ | < 3.0 | 10 |
| 50% Ethanol (v/v) | 2 hours at 70 ℃ | < 3.0 | 10 |
| Substitute of Olive oil | - | - | - |
| 95% Ethanol | 2 hours at 60 ℃ | < 3.0 | 10 |
| Isooctane | 0.5 hour at 40 ℃ | < 3.0 | 10 |

B: #2

- Note: 1. mg/dm^2 = milligram per square decimeter
 - 2. $^{\circ}C$ = degree Celsius
 - 3. < = less than
 - 4. "-" = Not regulated







Test Report

No: GZFDO100804251FD

SAMPLE DESCRIPTION: #1: Transparent Glass Clock, #2: Sublimation Glass Clock Back


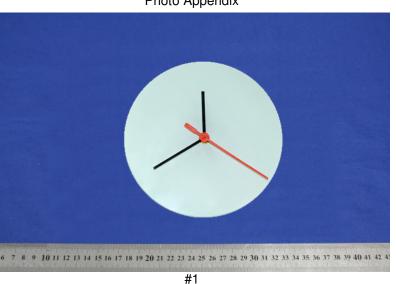


Photo Appendix



#2 SGS authenticate the photo on original report only *** End of Report***

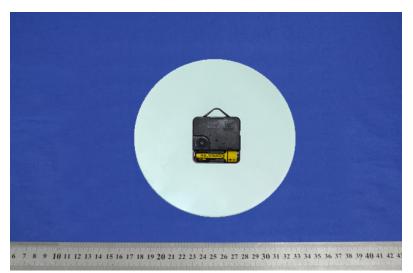

Member of the SGS Group (SGS SA)